

AM31-12W12V User Manual

380V Series 12W low-power AC-DC step-down power module



Chengdu Ebyte Electronic Technology Co.,Ltd.

This product manual is subject to change with the continuous improvement of the product, please refer to the latest version of the technical document.
Chengdu Ebyte Electronic Technology Co., Ltd. reserves the right of final interpretation and modification of all contents in this manual.

Chapter 1 product overview

1.1. Brief Introduction


AM31-12W12V is an ultra-small volume switching power module, AC and DC use,

Input voltage 85~264Vac/100~370Vdc, ultra-low ripple, ultra-low power consumption, high efficiency,

Safety isolation, high reliability and other advantages; Comply with IEC60950, EN60950, UL60950

Certification standards, peripherals do not need to increase EMI related components, significantly reducing user design doors

A sill; Households do not need to consider stability, even in extremely complex voltage environments, can also be stable Set the output.

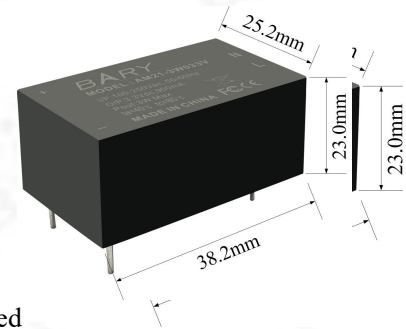

dual

1.2. Features

- Ultra-low ripple: The full load ripple is less than 120mV;
- Input voltage: Global general voltage 85 ~ 450Vac/120~630Vdc;
- Certification standards: In line with IEC60950, EN60950, UL60950 certification standards, Peripheral devices do not need to add EMI related components;
- Protection measures: over voltage protection, over current protection, short circuit protection, over temperature protection;
- High quality program: its working efficiency is greatly improved, with an average efficiency of 79%;

1.3. Application

- Automobile charging pile;
- Security alarm;
- Smart home;
- Industry, electric power, instrumentation;
- Single-chip microcomputer motherboard (MCU);
- Intelligent street lamp, energy-saving lamps;
- Intelligent switch, socket;
- RF communication equipment;

This product manual is subject to change with the continuous improvement of the product, please refer to the latest version of the technical document.

Chengdu Ebyte Electronic Technology Co., Ltd. reserves the right of final interpretation and modification of all contents in this manual.

Chapter I Specification parameters

2.1. Limit parameters

NO.	Parameters	Min	Max	Notes
1	Input voltage (Vac)	85	450	Vac
2	Input voltage (Vdc)	120	630	Vdc
3	Output power (W)	0	12	W
4	Operating temperature (°C)	-40	+85	ta=40°C, tc=85°C

2.2. Operating parameter



NO.	Parameters	Min	Typical	Max	Notes
1	Input voltage	100	-	430	Vac
2	Input voltage	120	-	600V	Vdc
3	Start-up time	-	-	1500	mS
3	Operating frequency	45	50	60	Hz
4	Output power	0	-	12	W
5	Operating temperature	-40	+25	85	ta=40°C, tc=85°C
6	Power factor	0.4	-	0.55	>0.55 at 120Vac / >0.4 at 230Vac 带 With full load
7	Static power consumption	-	-	1.0	<=1 mA / 240Vac
8	Output voltage	11.9	12.1	12.3	Vdc
9	Sustained current	0	-	1	A
10	Ripple noise	-	-	120	mV
11	Conversion efficiency	-	-	79	%
12	Overcurrent protection	110	-	150	%(Constant current limit, automatic recovery)
13	Short circuit	-	-	-	Hiccup mode: automatically recovers after the fault is

This product manual is subject to change with the continuous improvement of the product, please refer to the latest version of the technical document.

Chengdu Ebyte Electronic Technology Co., Ltd. reserves the right of final interpretation and modification of all contents in this manual.

	protection				eliminated
14	Working humidity	20	-	90	RH% non-condensing
15	Storage temperature	-40	+25	+85	°C Dry storage at room temperature
16	Working humidity	10	-	90	RH% Dry storage at room temperature
17	Withstand voltage	-	-	3000	I/P - O/P: 3000VAC
18	Insulation impedance	-	-	100	I/P - O/P: 100M ohms / 500VDC at 25 °C

2.3. Work efficiency and load

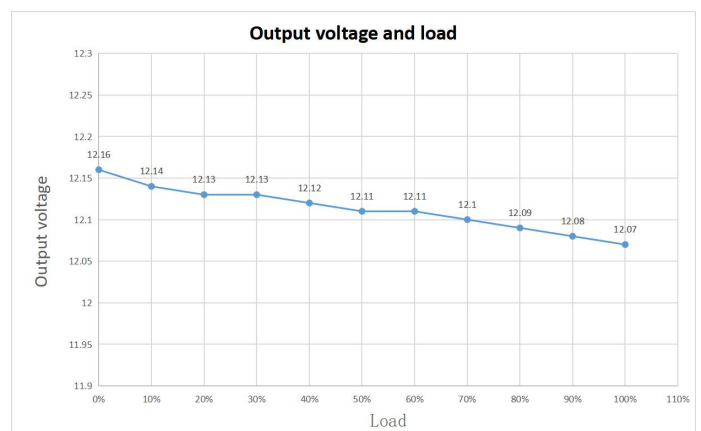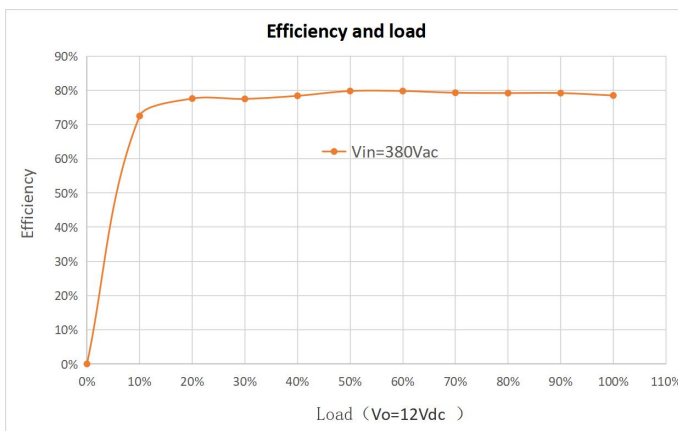

Chapter 3 Basic Operations

3.1. Notes


- The operation of this module requires certain professional skills, strict non-professional life to operate and disassemble it!
- Before use, be sure to carefully learn the knowledge of safe use.
- After powering on the power supply, strictly contact the L and N power cables to prevent electric shock. Isolation of the input front end is recommended.
- The maximum input voltage must not exceed 250Vac, otherwise it may cause permanent damage to the module.
- During routine maintenance, the input power supply should be disconnected first to prevent electric shock transmission accidents.

This product manual is subject to change with the continuous improvement of the product, please refer to the latest version of the technical document.

Chengdu Ebyte Electronic Technology Co., Ltd. reserves the right of final interpretation and modification of all contents in this manual.

Chapter 4 Mechanical characteristics and pin definition

4.1. Product Size

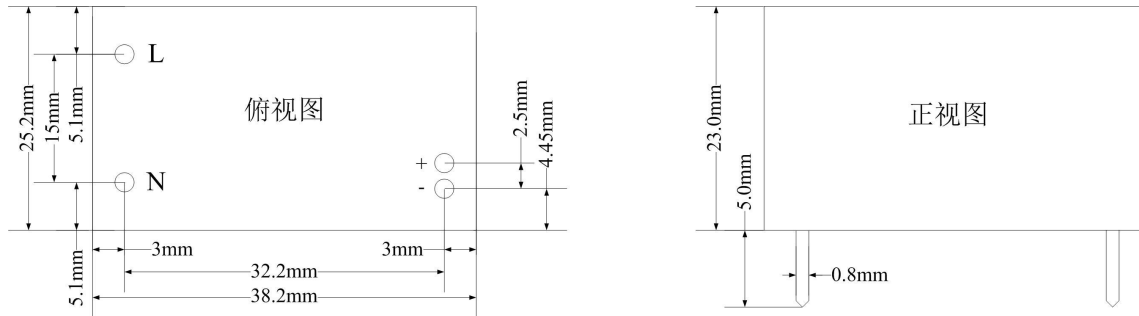

Chapter 5 product selection

P/N	Input voltage	Output voltage	Output current	efficiency	Installation mode
AM31-12W05V	85 ~ 450Vac	5Vdc	2.4A	76%	Plastic sealing plug
AM31-12W12V	85 ~ 450Vac	12Vdc	1A	79%	Plastic sealing plug
AM31-12W24V	85 ~ 450Vac	24Vdc	0.5A	83%	Plastic sealing plug

Revise History

NO.	Version	Revise Date	Revise description	maintainer
1	V1.0	20221228	First edition, first release	FX
2	V1.1	20230321	Modify parameter	LJ

This product manual is subject to change with the continuous improvement of the product, please refer to the latest version of the technical document.

Chengdu Ebyte Electronic Technology Co., Ltd. reserves the right of final interpretation and modification of all contents in this manual.

About Us

Sales hotline: 4000-330-990 Company Tel: 028-61399028

Technical support: support@cdebyte.com

Official website: www.ebyte.com

Address: Building B5, 199 West Avenue, Gaoxin West District, Chengdu City, Sichuan Province



This product manual is subject to change with the continuous improvement of the product, please refer to the latest version of the technical document.

Chengdu Ebyte Electronic Technology Co., Ltd. reserves the right of final interpretation and modification of all contents in this manual.