



DM41-20W1205B1

20w Isolated Step-down Dc-dc Power Supply



Contents

Disclaimer.....	2
1 Introduction.....	3
1.1 Brief Introduction.....	3
1.2 Features.....	3
1.3 Application.....	3
2 Specification and parameter.....	4
2.1 Limit parameter.....	4
2.2 Operating parameter.....	4
2.3 Work efficiency & load.....	5
2.4 Input derating design.....	5
3 Basic operation.....	6
3.1 Matters need attentions.....	6
4 Mechanical Characteristics and Pin Definition.....	6
4.1 Product size.....	6
4.2 Typical application.....	6
4.3 Pin definition.....	7
5 Product selection.....	7
Revision history.....	7
About us.....	7

Disclaimer

EBYTE reserves all rights to this document and the information contained herein. Products, names, logos and designs described herein may in whole or in part be subject to intellectual property rights. Reproduction, use, modification or disclosure to third parties of this document or any part thereof without the express permission of EBYTE is strictly prohibited.

The information contained herein is provided “as is” and EBYTE assumes no liability for the use of the information. No warranty, either express or implied, is given, including but not limited, with respect to the accuracy, correctness, reliability and fitness for a particular purpose of the information. This document may be revised by EBYTE at any time. For most recent documents, visit www.ebyte.com.

1 Introduction

1.1 Brief Introduction

DM41-20W1205B1 is an isolated DC-to-DC (DC-DC) low-power step-down power supply module, which continuously outputs 20W power, wide voltage 9~18V input, maximum efficiency up to 80%, and low heat generation, large Lower user design threshold. All components come from formal procurement channels, and the industrial grade design is -40~85°C, and the output can be stabilized even in a complex voltage environment.



1.2 Features

- Isolation and step-down: filter out the peak value of the power supply, effectively protecting the back-end load equipment from being damaged;
- Output power: 20W/5V/4000mA sustainable;
- Ultra-small size: 50.8*25.4*11mm, metal shell;
- Overcurrent protection: The maximum operating current is preset inside the module, which can automatically recover after the fault is eliminated;
- Short-circuit protection: automatic recovery after the fault is eliminated;
- Isolation withstand voltage: 1000V.

1.3 Application

- Power supply for industrial control equipment;
- RS485/RS232 communication equipment;
- Intelligent robot;
- Wireless communication equipment;
- Industrial control motherboard;
- On-board power supply;
- Charging pile power supply system;
- Smart home and industrial sensors, etc.;
- The internal power supply system of the security alarm;
- Single-chip microcomputer motherboard (MCU), toys;
- LED drive lights with power supply;
- Smart street lights.

2 Specification and parameter

2.1 Limit parameter



Main parameter	Performance		Remark
	Minimum	Maximum	
Input voltage (Vdc)	8.8	18.5	V (The work voltage shall not exceed 18Vdc, Otherwise it will permanently damaged.)
Output power (W)	0	20	W
Working temperature (°C)	-40	+85	°C

2.2 Operating parameter



Serial number	Main parameter	Performance			Remark
		Min	Type	Max	
Input	Input voltage-DC	9	12	18	Vdc
	Working frequency	280	300	330	KHz
	Static power	-	-	<0.4	W
	Highest efficiency	-	-	80	%
Output	Output voltage	4.95	5	5.15	V
	Continuous current	0	-	4	mA
	Output Power	0	-	20	W
	Ripple noise	10	-	50	mV
	Voltage adjustment range	-	±0.5	-	V
	Output voltage accuracy	-	-	±1	%
	Boot time	400	550	1000	ms
	Line regulation	-	0.5	-	%
	Load regulation	-	1.0	-	%
Protection	Overcurrent protection	110	-	150	%
	Short circuit protection	-	-	-	Hiccup mode, automatic recovery after the fault state is eliminated
Surroundings	Operating temperature	-40	25	85	ta=40°C,tc=85°C
	Working humidity	20	-	90	No condensation
	storage temperature	-40	+25	+85	Dry and store at room temperature

	Storage humidity	10	-	90	Dry and store at room temperature
Safety	Insulation withstand voltage	-	-	1000	VAC I/P - O/P
	Insulation resistance	-	-	500	I/P - O/P: 100M ohms / 500VDC at 25 °C
	safety regulations	Comply with FCC CE ROHS certification standards			
Others	Product Size	50.8x25.4x11mm			
	product weight	21.5	22	22.5	g

2.3 Work efficiency & load

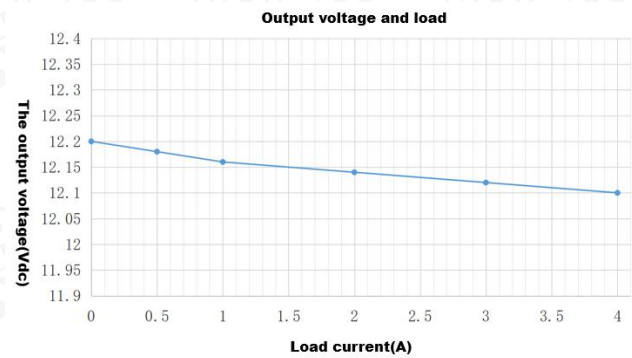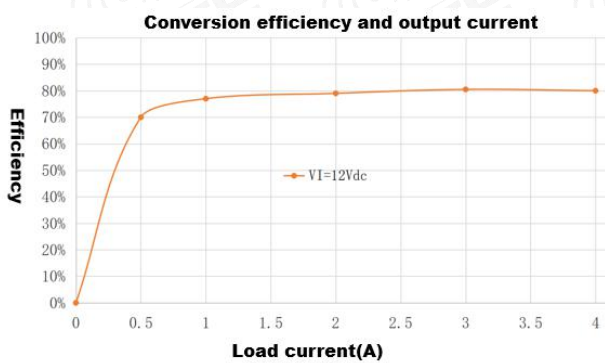

2.4 Input derating design

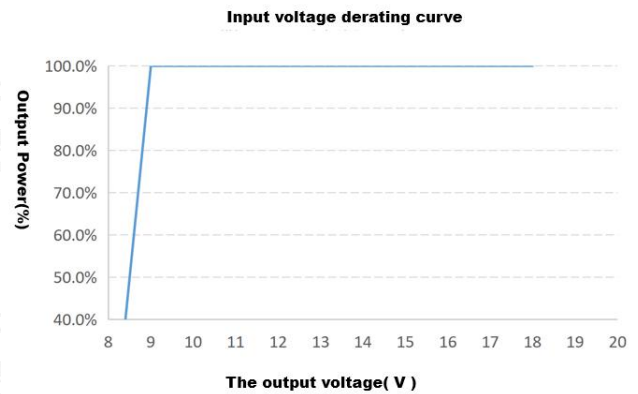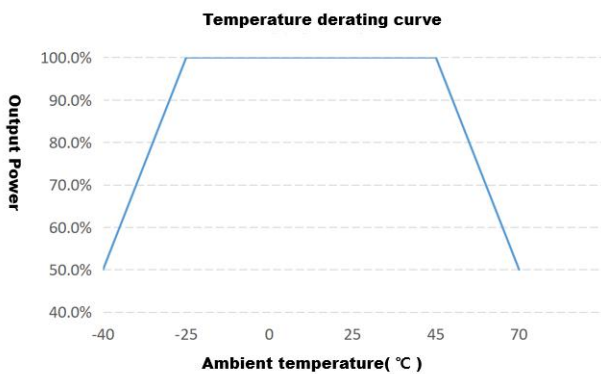


3 Basic operation

3.1 Matters need attentions


- Operation of this module requires certain professional skills, and it is strictly forbidden to operate it by non-professional life;
- Be sure to read this technical document carefully before use;
- It is strictly forbidden for the human body to touch the components after power on;
- The maximum input voltage must not exceed 18Vdc, otherwise it may cause permanent damage to the module;
- The temperature is high when working under full load, please do not touch it!
- Do not short-circuit the output terminal directly, otherwise it will cause permanent damage to the module;
- The over-current protection function is only valid when $V_{IN} = 9\sim 12V$, the over-current point will become larger when $V_{IN} = 9\sim 12V$, so be careful.

4 Mechanical Characteristics and Pin Definition

4.1 Product size

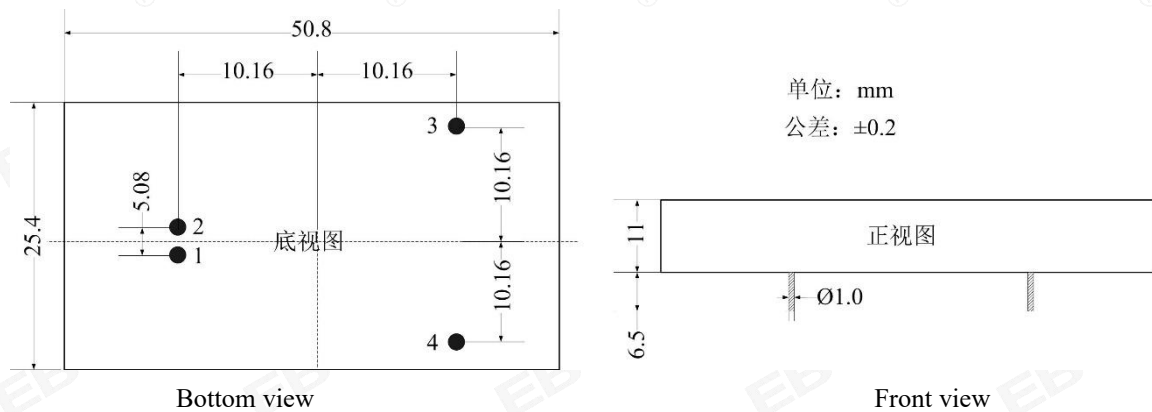

4.2 Typical application

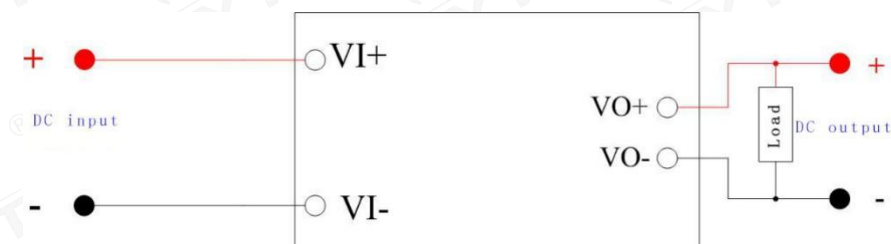

4.3 Pin definition

Serial number	Pin name	Direction	Use
1	Vi+	Input	Power supply input is positive.
2	Vi-	Input	Power supply input is negative.
3	Vo-	Output	Power supply output is negative.
4	Vo+	Output	Power supply output is positive.

5 Product selection

Product model	Input voltage	Output voltage	Output current	Efficiency	Size	Installation mode
DM41-20W1205B1	9.0 ~ 18Vdc	5Vdc	4000mA	80%	50.8*25.4*11mm	Plastic package plug-ins
DM41-20W1212B1	9.0 ~ 18Vdc	12Vdc	1666mA	80%	50.8*25.4*11mm	Plastic package plug-ins
DM41-10W2405B1	18 ~ 36Vdc	5Vdc	4000mA	80%	50.8*25.4*11mm	Plastic package plug-ins
DM41-10W2412B1	18 ~ 36Vdc	12Vdc	1666mA	80%	50.8*25.4*11mm	Plastic package plug-ins

Revision history

Version	Date	Description	Issued by
V1.0	2019/09/17	First edition, first public release.	LJ

About us

Technical support: support@cdebyte.com

Documents and RF Setting download link: www.ebyte.com

Thank you for using Ebyte products! Please contact us with any questions or suggestions: info@cdebyte.com

Phone: +86 028-61399028

Web: www.ebyte.com

Address: B5 Mould Park, 199# Xiqu Ave, High-tech District, Sichuan, China

 **Chengdu Ebyte Electronic Technology Co.,Ltd.**