



TX400-BLG-60 Product Data Sheet

433M/470M Dual-Band Fiberglass Antenna
N-J Connector



I. Product Introduction


TX400-BLG-60 is a 433MHz/470MHz dual-band fiberglass antenna. Height of the antenna is 600mm, with a N-J connector (N male) and fiberglass shell. With several groups of antenna oscillators, it is suitable for long distance communication with its high gain, and it is widely used in the wild and other harsh environment because it's weatherproof. Due to its high stability and reliability, and wide band, the fiberglass antenna is applicable to LoRa module, wireless terminal equipment, base station, gateway, wireless module, AP, wireless data transmission station and other equipment with high requirements.

II. Specification and Parameters

Physical Parameters	
Frequency	433MHz/470MHz Dual-Band
Bandwidth	410MHz-510MHz
Gain	6dBi
SWR	≤ 1.5
Polarization	Vertical
Radiation Direction	Omnidirectional
Input Impedance	50 Ω
Power Capacity	100W
Other Parameters	
Height	600mm
Total Weight	183g
Diameter	$\Phi 20\text{mm}$
Coat Material	Fiberglass
Interface	N-J
Working Temperature	-40°C ~ +85°C
Storage Temperature	-40°C ~ +85°C



III. Testing

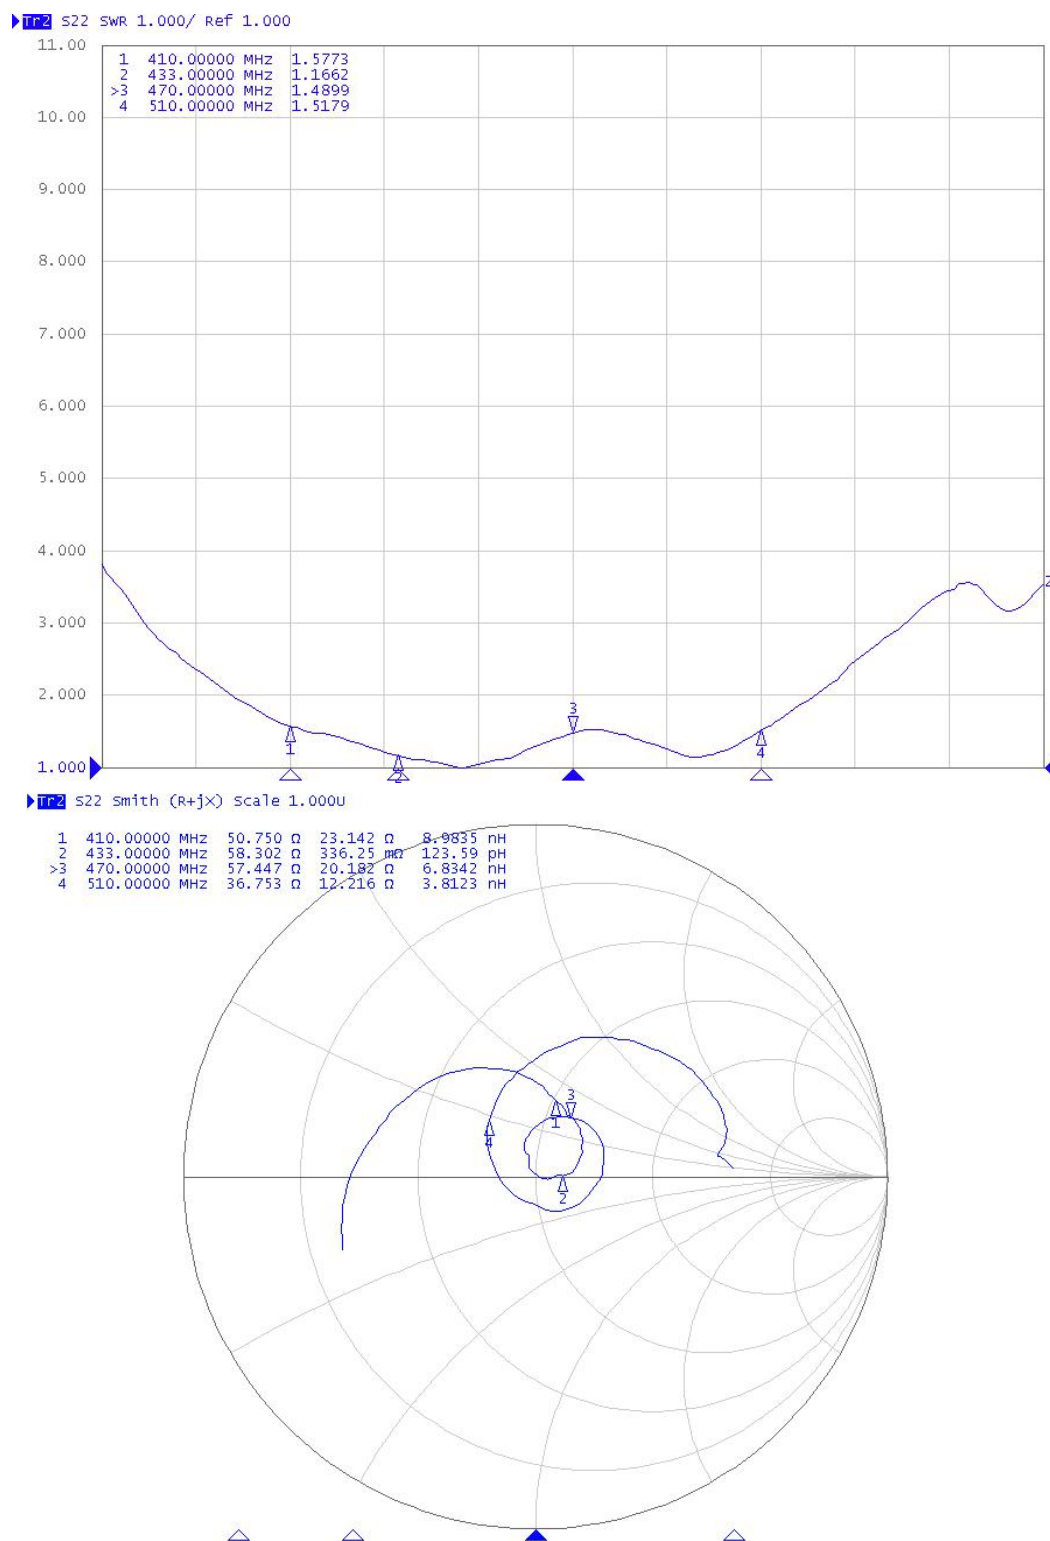

IV. FAQ

- Antenna frequency shall be matched with that of the wireless devices, or the communication will be affected;
- Diffraction performance will be better with lower communication frequency and longer wave;
- Communication distance will be shorter if there is any straight-line barrier;
- Please be noted of the antenna radiation direction. Incorrect direction by installation will result in short communication distance;
- As radio wave may be absorbed by the ground, result will be affected if tested close to ground. It is suggested to test at a higher place;
- As radio wave can be highly absorbed by the ocean water, result will be affected if tested close to the sea;
- Signal will be seriously weakened if the antenna is put close to metal or inside metal shell;
- Lower impedance matching of antenna and communication devices will result in bad communication.

About us

Technical support: support@cdebyte.com

Documents and RF Setting download link: www.ebyte.com

Thank you for using Ebyte products! Please contact us with any questions or suggestions: info@cdebyte.com

Fax: 028-64146160 ext. 821

Web: www.ebyte.com

Address: Innovation Center D347, 4# XI-XIN Road, Chengdu, Sichuan, China

