



E78-400TBL-02 User Manual

Test Kit



Contents

Disclaimer3

1. Introduction 4

 1.1 Size and interface specification5

2. Quick start7

 2.1 Test preparation 7

About us8

Disclaimer

The information in this document, including the URL address for reference, is subject to change without notice. The document is provided "as is" without any guarantee responsibility, including any guarantee for marketability, suitability for a specific purpose, or non-infringement, and any guarantee for any proposal, specification or sample mentioned elsewhere. This document does not bear any responsibility, including the responsibility for infringement of any patent rights caused by the use of the information in this document. This document does not grant any license for the use of intellectual property rights in estoppel or other ways, whether express or implied.

The test data obtained in the article are all obtained by the Ebyte laboratory, and the actual results may vary slightly.

We hereby declared that all brand names, trademarks and registered trademarks mentioned in this document are the property of their respective owners.

The final interpretation right belongs to Chengdu Ebyte Electronic Technology Co., Ltd.

Notice :



Due to product version upgrades or other reasons, the contents of this manual may be changed. Ebyte Electronic Technology Co., Ltd. reserves the right to modify the contents of this manual without any hint or notice. This manual is only used as a guide. Chengdu Ebyte Electronic Technology Co., Ltd. makes every effort to provide accurate information in this manual. However, we do not guarantee that the contents of the manual are completely free of errors. All statements, information and suggestions in this manual do not constitute any express or implied guarantee.



1. Introduction

E78-400TBL-02 is a complete set of test products specially for E78 series SMD SOC modules combined with USB to TTL serial port backplane. All E78-470LN22S (6601) module pins have been drawn out for customer testing and development, which greatly reduces customer testing and development difficulty.

1.1 Size and interface specification

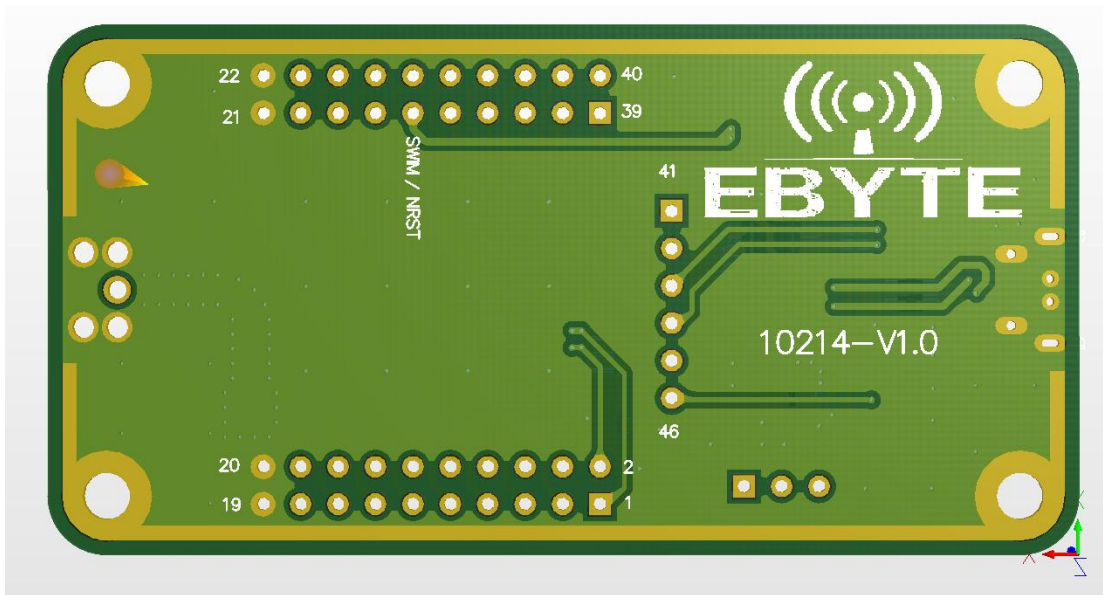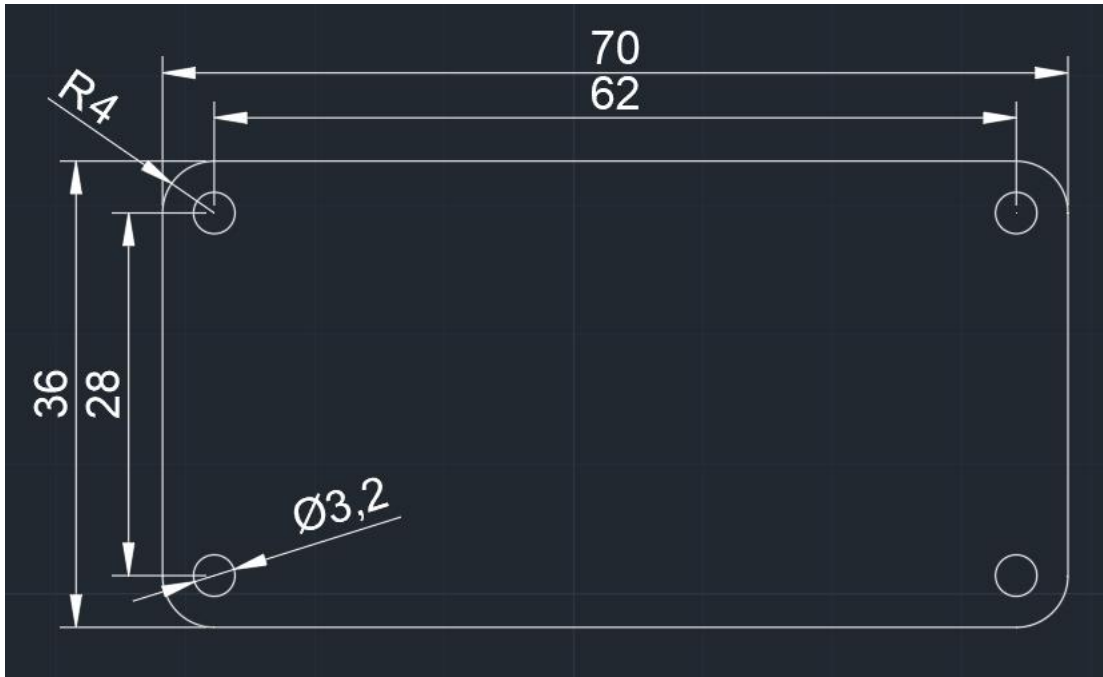

Pin number	Definition	Function Description
1	LCD_SEG8	User-defined IO pin
2	LCD_SEG9	User-defined IO pin
3	LCD_SEG11	User-defined IO pin
4	LCD_SEG10	User-defined IO pin
5	LCD_SEG13	User-defined IO pin
6	LCD_SEG12	User-defined IO pin
7	LCD_SEG15	User-defined IO pin
8	LCD_SEG14	User-defined IO pin

9	LCD_SEG17	User-defined IO pin
10	LCD_SEG16	User-defined IO pin
11	I2C_SCL	Module I2C_SCL pin
12	I2C_SDA	Module I2C_SDA pin
13	ADC_IN1	Module ADC_IN1 input pin
14	ADC_IN0	Module ADC_IN0 input pin
15	GPIO3	User-defined IO pin
16	GPIO2	User-defined IO pin
17	ADC_IN2	Module ADC_IN2 input pin
18	GPIO4	User-defined IO pin
19	GND	Baseboard reference ground
20	GND	Baseboard reference ground
21	GND	Baseboard reference ground
22	GND	Baseboard reference ground
23	SPI_SLCK	Module SPI_SLCK pin
24	SPI_NSS	Module SPI_NSS pin
25	SPI_MOSI	Module SPI_MOSI pin
26	SPI_MISO	Module SPI_MISO pin
27	LCD_SEG2	User-defined IO pin
28	LCD_SEG1	User-defined IO pin
29	NRST	Module external reset pin
30	SWIM	Module SWIM pin
31	LCD_COM1	User-defined IO pin
32	LCD_COM0	User-defined IO pin
33	VREFP	Module ADC reference voltage input pin
34	LCD_COM2	User-defined IO pins
35	UART1_TX	Module UART1_TX pin
36	UART1_RX	Module UART1_RX pin
37	LCD_SEG0	User-defined IO pins
38	VLCD	Module VLCD pin, when it is LCD_xx, the pin should be connected to the power supply 3.3V
39	LCD_SEG3	User-defined IO pins
40	LCD_COM3	User-defined IO pins
41	LCD_SEG4	User-defined IO pins
42	LCD_SEG5	User-defined IO pins
43	UART0_RX	Module UART0_RX pin
44	UART0_TX	Module UART0_TX pin
45	LCD_SEG6	User-defined IO pins
46	LCD_SEG7	User-defined IO pins

2. Quick start


2.1 Test preparation

2.1.1 Driver Installation

Please go to the official website to download the driver CH341SER.EXE, and double-click to install. This driver supports 32/64-bit Windows 10/8.1/8/7/VISTA/XP, SERVER2016/2012/2008/2003, 2000/ME/98, certified by Microsoft digital signature, and supports USB to 3-wire and 9-wire serial ports etc.

2.1.2 hardware connection

Please prepare the Micro USB cable and antenna, connect them to the E78-400TBL-02 accordingly, and open the corresponding serial port.

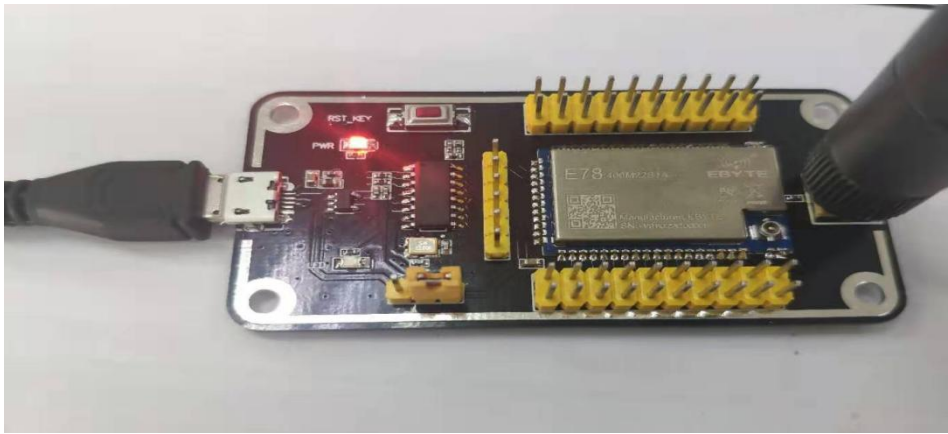

As shown in the figure, plug in the jumper cap and select **3.3V power supply**. Both E78-400TBL-02 are configured in this way. Open the corresponding serial port to send and receive data.

(Please refer to the E78-470LN22S (6601) product manual for related instructions)



About us

Technical support: support@cdebyte.com

Documents and RF Setting download link: www.cdebyte.com

Thank you for using Ebyte products! Please contact us with any questions or suggestions: info@cdebyte.com

Official hotline:028-61399028

Web: www.cdebyte.com

Address: , Building B5, Mould Industrial Park, 199# Xiqu Ave, High-tech Zone, Chengdu, 611731, Sichuan, China



Chengdu Ebyte Electronic Technology Co.,Ltd.