



DC BRUSHLESS FAN

AF9D1504H 15*15*4mm

Motor:DC Brushless

Bearing:Hydraulic

Shell frame: PBT UL94V-0

Fan blade: PBT UL94V-0

Insulation:Class B


Wire:AWG#26UL1007 (optional)

PIN1:BLACK WIRE---(-)


PIN2:RED WIRE---(+)



DIMENSIONS DRAWING(unit:mm)

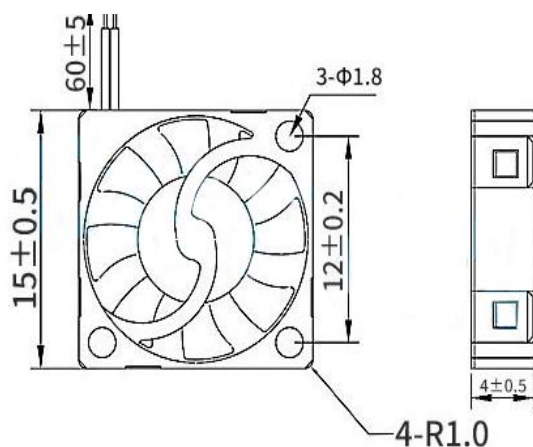

P@Q CURVE(AT RATED VOLTAGE)

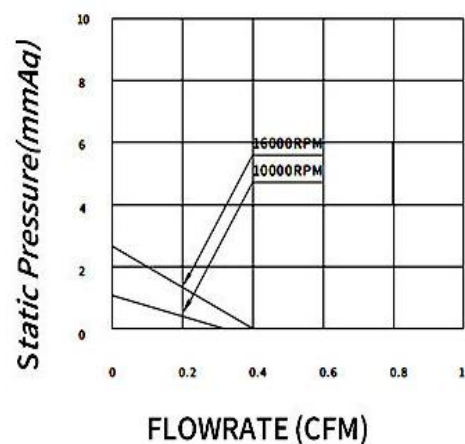

Model	Bearing Mode①	Rated Volt	Operating	Rated curr	Rated input	Speed	Maximum air Flow		Maximum Air pressure		Noise
PART. NO.		VDC	VDC	Amp	Watt	R. P. M	M3/min	CFM	mmH2O	InH2O	dB-A
AF9D1504H3.3LX-A	B=Ball S=Sleeve H=Hydraulic	3.3	2~6	0.03	0.10	10000	0.009	0.30	1.50	0.376	<25
AF9D1504H05LX-A		5	2~6	0.1	0.20	16000	0.011	0.40	2.80	0.12	<35


①Bearing Mode:Ball/ Sleeve/Hydraulic/Ball (UL)/Sleeve (UL)Hydraulic (UL)

②X=Function: FG RD RDL LD PWM TP VC RC CS RP SS AS CL IPX5

③A=Plug

④C=Customized by customers: Air volume, Air duct, Movement, Service life, Temperature, Noise, Material, Mold. etc.

导引：编码规则Code Rule

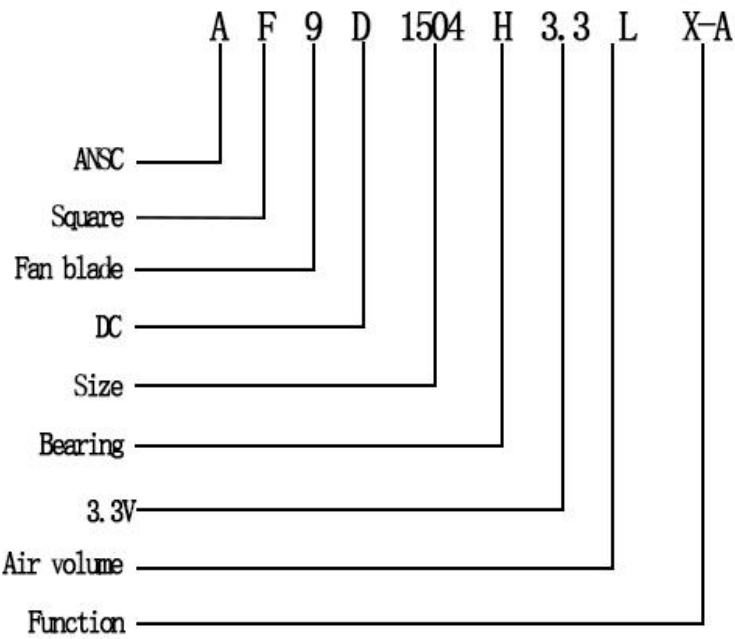

*PROPRIETARY AND CONFIDENTIAL ,THE INFORMATION CONTAINED IN THIS DRAWING IS THE
SOLE PROPERTY OF <ALL NEW SEMI>.
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF
<ALL NEW SEMI> IS PROHIBITED.

<https://allnewsemi.com>
<https://allnewsemi.shop>