



## **TX433-JKS-20 Datasheet v1.0**



**Picture****TX433-JKS-20****Physical parameter****TX433-JKS-20**

| No. | Parameter item | Parameter details & Description |
|-----|----------------|---------------------------------|
| 1   | Model          | TX433-JKS-20                    |
| 2   | Size           | Ø 13.0 * 195 mm                 |
| 3   | Average Weight | 20 ± 1 g                        |
| 4   | Shape Feature  | Flexible                        |
| 5   | Color          | Black                           |
| 6   | Material       | TPEE                            |
| 7   | Connector Type | SMA-J                           |
| 8   | Cable Length   | -                               |

**Electrical parameter****TX433-JKS-20**


| No. | Parameter item      | Parameter details & Description |
|-----|---------------------|---------------------------------|
| 1   | Frequency Range     | 410 ~ 450 MHz                   |
| 2   | Gain                | 3 dBi                           |
| 3   | SWR                 | ≤ 1.5                           |
| 4   | Power Capacity      | 10 W                            |
| 5   | Input Impedance     | 50 Ω                            |
| 6   | Polarization Type   | Vertical polarization           |
| 7   | Radiation Direction | Omnidirectional                 |

**Dimension****TX433-JKS-20****Test report****TX433-JKS-20**

【Testing Instrument】： Angilent E5071C

【Test address】： Chengdu Ebyte Electronic Technology Co.,Ltd.



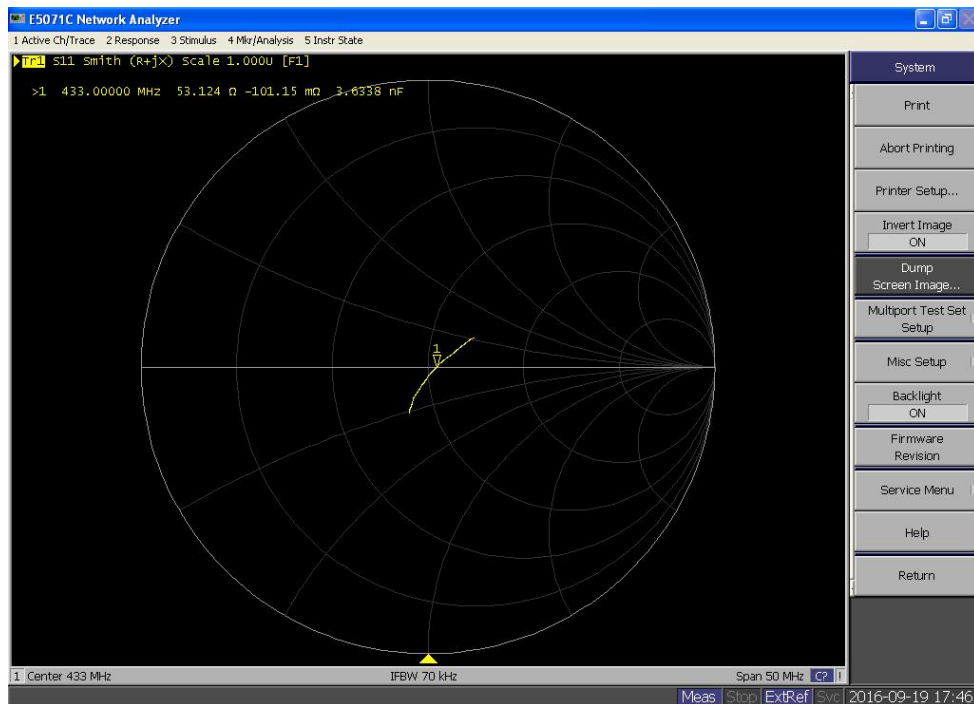

## About us

Technical support: [support@cdebyte.com](mailto:support@cdebyte.com)

Documents and RF Setting download link: [www.cdebyte.com](http://www.cdebyte.com)

Thank you for using Ebyte products! Please contact us with any questions or suggestions:

[lirong@cdebyte.com](mailto:lirong@cdebyte.com)

Phone: 028-61543675

Web: [www.cdebyte.com](http://www.cdebyte.com)

Address: Building B5, Mould Industrial Park, 199# Xi-Qu Ave, West High-tech Zone, Chengdu, 611731, Sichuan, China



**Chengdu Ebyte Electronic Technology Co.,Ltd.**